PRECISION OPTICS / TUBE SERIES

TUBE RED DOT SIGHT

TRD-22 | 2 MOA DOT + 26 MOA CIRCLE



Sealed tubular construction. Dust- and water-resistant, rugged and ready for fast adaptation to changing environments — with long battery life and a Picatinny-rail mount for close-range rapid aiming.

1×	Ø22	2+26	10,000h+	IPX7	<180g
MAGNIFICATION	WINDOW / MM	MOA RETICLE	RUNTIME	WATERPROOF	WEIGHT

PRODUCT VIEWS.

TRD-22 / HOUSING · OBJECTIVE · MOUNT



ON-RAIL CONFIGURATION

SEALED TUBULAR HOUSING

A closed cylindrical body, dust- and water-resistant, with long battery life and a Picatinny-rail mount for close-range rapid aiming.



VIEW 01 SIDE PROFILE



VIEW 02 TOP / CONTROLS



VIEW 03 FRONT ANGLE



VIEW 04 FRONT / OBJECTIVE

1×	Ø22	2 MOA	IPX7
MAGNIFICATION	WINDOW / MM	AIMING DOT	INGRESS PROTECTION

Housing, objective and rail-mount views of the sealed tube construction.

BUILT FOR FAST, CLOSE-RANGE AIMING.

TRD-22 / SEALED TUBE RED DOT SIGHT

PRODUCT OVERVIEW

A closed tubular housing keeps dust and water out while standing up to hard use, giving the sight dependable environmental adaptability in the field.

Long-lasting battery power and Picatinny-rail compatibility balance stability with everyday practicality. The optic is intended for fast, close-range aiming on firearms in military, law-enforcement and tactical shooting applications.



RETICLE VIEW · 2 MOA DOT + 26 MOA CIRCLE

KEY FEATURES

06 POINTS

01

SEALED TUBE BODY

Closed tubular housing, dust- and water-resistant, built for hard use and fast adaptation to changing environments.

02

DUAL RETICLE

2 MOA centre dot with a 26 MOA circle for a fast, unambiguous aiming picture.

03

12 BRIGHTNESS LEVELS

Twelve intensity settings including two night-vision compatible levels.

04

LONG RUNTIME

≥10,000 h of continuous operation at medium brightness on one CR2032 cell.

05

AUTO SLEEP

Switches off after 240 seconds without movement; CR2032 cell, ≥10,000 h at medium brightness.

06

PICATINNY MOUNT

Rail-mounted configuration that keeps the sight stable and ready for close-range aiming.



DOT + CIRCLE RETICLE

A crisp 2 MOA centre dot for precision, surrounded by a 26 MOA circle that pulls the eye to the aim point quickly. Aiming dot size 2 MOA; click value 0.48 MOA/click; travel ≥±40 MOA.

2+26

MOA

TECHNICAL SPECIFICATIONS.

TRD-22 / ALL VALUES PER THE SOURCE DATA SHEET

01	Magnification	1×
02	Window Diameter	Ø22 mm
03	Aiming Dot Size	2 MOA
04	Click Value	0.48 MOA/click
05	Windage & Elevation Range	≥±40 MOA
06	Reticle	2 MOA dot + 26 MOA circle
07	Power Source	CR2032 battery
08	Continuous Operating Time	≥10,000 h (medium brightness)
09	Brightness Settings	12 levels, incl. 2 night-vision levels
10	Auto Sleep	After 240 s without movement
11	Ingress Protection	IPX7
12	Dimensions	68 mm × 42 mm × 65 mm
13	Weight	<180 g

12 BRIGHTNESS LEVELS / 2 NIGHT-VISION LEVELS

Twelve intensity settings, including two night-vision levels, plus an auto-sleep function that switches the sight off after 240 seconds without movement.



AT A GLANCE




1× magnification
CR2032 · ≥10,000 h runtime
IPX7 · 68 × 42 × 65 mm
<180 g

All specifications are typical and subject to change without notice.

END OF TECHNICAL DATA / TRD-22

IN THE FIELD.

A sealed, dust- and water-resistant tubular sight for fast close-range aiming in military, law-enforcement and tactical shooting applications.

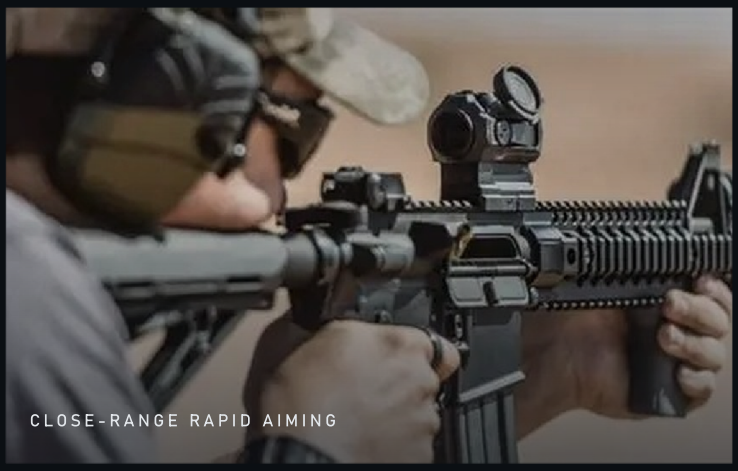

CLOSE-RANGE RAPID AIMING

PRODUCT PROFILE

A SEALED TUBE THAT KEEPS GOING.

Long battery life and Picatinny-rail compatibility balance stability with everyday practicality, in a rugged housing built for changing environments.

WINDOW	Ø22 mm
RETICLE	2 + 26 MOA
CLICK VALUE	0.48 MOA/click
BATTERY	CR2032 / ≥10,000 h
PROTECTION	IPX7
DIMENSIONS	68 × 42 × 65 mm

01 / APPLICATION

MILITARY

Fast close-range aiming with a 1× optical system and a 2 MOA dot.

02 / APPLICATION

LAW ENFORCEMENT

Rugged sealed housing, ≥10,000 h runtime and 12 brightness levels.

03 / APPLICATION

TACTICAL SHOOTING

Picatinny-rail mounting with ≥±40 MOA windage and elevation travel.

BRIMOB

BRIMOB CUSTOM EDITION

TUBE RED DOT SIGHT · TRD-22